



DETAIL TOPCAP



DETAIL NAMEPLATE

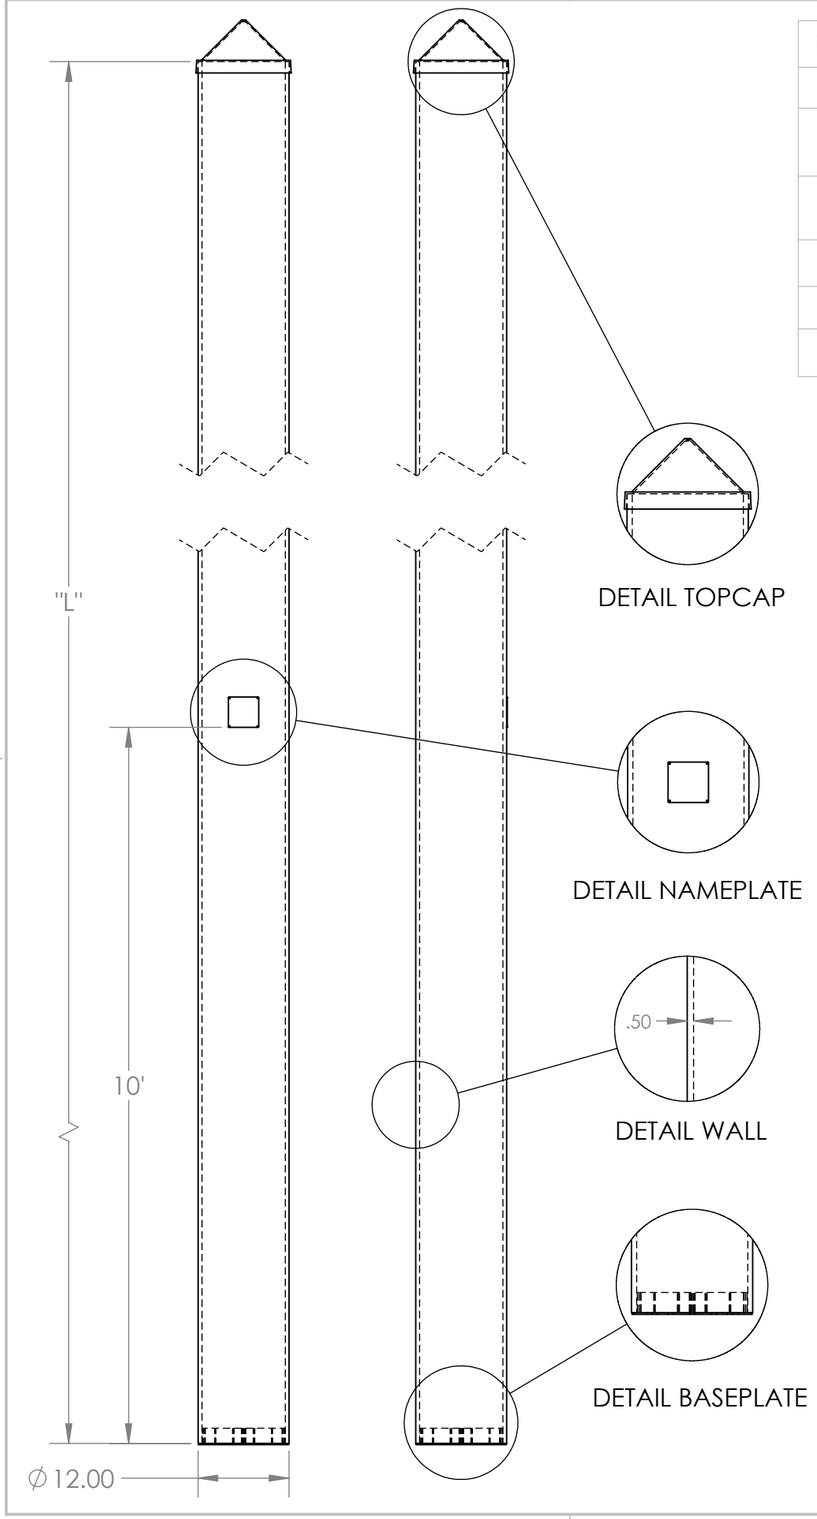


DETAIL WALL



DETAIL BASEPLATE

| ITEM NO. | DESCRIPTION | QTY. |
|---|---|---|
| 1 | 12" x 0.5" x XX.X FT LG PULTRUDED TUBE | 1 |
| 2 | 12" BLACK, 30% GLASS-FIBER REINFORCED HIGH-IMPACT POLYPROPYLENE POLE CAP | 1 |
| 3 | 12" BLACK, 30% GLASS-FIBER REINFORCED HIGH-IMPACT POLYPROPYLENE POLE BASE PLATE | 1 |
| 4 | #8 x 1/2" TORX TAMPER PROOF SECURITY SCREWS (T-15) 410 SS | 4 |
| 5 | ALUMINUM NAMEPLATE | 1 |
| 6 | #10 x 1" SELF-DRILLING 410 SS HEX HEAD SCREWS | 8 |

# EnduraPOLE™
## FRP COMPOSITE UTILITY POLES

**TOPCAP-**
BLACK, 30% GLASS-FIBER REINFORCED HIGH-IMPACT POLYPROPYLENE SECURED WITH 4 #10 x 1" SELF-DRILLING 410 SS HEX HEAD SCREWS 90 DEG APART

**NAMEPLATE-**
ALUMINUM
SECURED WITH 4 #8 x 1/2" TORX TAMPER-PROOF SECURITY SCREWS (T-15) 410 SS

CONTAINS THE FOLLOWING INFORMATION:

EnduraPOLE™ LOGO
MANUFACTURE DATE
POLE WEIGHT
LENGTH
CLASS
POLE SERIAL NO.
PART NO.
CUSTOMER NAME

**BASE PLATE-**
BLACK, 30% GLASS-FIBER REINFORCED HIGH-IMPACT POLYPROPYLENE WITH DRAIN HOLES SECURED WITH 4 #10 x 1" SELF-DRILLING 410 SS HEX HEAD SCREWS 90 DEG APART

NOTES:
1. POLES ARE BROWN (RAL 8014) IN COLOR. GRAY IS OPTIONAL
2. POLES ARE PREASSEMBLED WITH CAP AND BASEPLATE. HOLE PLUGS PROVIDED FOR PRE-DRILLED POLES.
3. FOR PRE-DRILLED POLE DRAWING/CATALOG NUMBERS, CONTACT ENGINEERING.
4. CAP AND BASEPLATE TO BE SECURED WITH 4 #10 x 1" SELF-DRILLING 410 SS HEX HEAD SCREWS EACH.
5. CLASS LOAD RATING IS SPECIFIED ON NAMEPLATE OF EACH POLE. DEFLECTION, BASED ON DEFLECTION EQUIVALENCY TO A WESTERN RED CEDAR POLE.
6. EnduraPOLE™ DEFLECTION NOT MORE THAN 110% OF A WOOD POLE (WRC) OF THE SAME CLASS AND SIZE.
7. RESERVE STRENGTH IS THE STRENGTH OF THE POLE OVER THE RATED CLASS LOAD.

| "L" [FT] | CLASS | RSV [%] (SEE NOTE 7) | WEIGHT [LBS] | CATALOG # |
|---|---|---|---|---|
| 30 | C1 | 81 | 473 | EP12050-30-C1 |
| 30 | C2 | 120 | 473 | EP12050-30-C2 |
| 35 | C1 | 51 | 552 | EP12050-35-C1 |
| 35 | C2 | 83 | 552 | EP12050-35-C2 |
| 40 | C1 | 27 | 630 | EP12050-40-C1 |
| 40 | C2 | 55 | 630 | EP12050-40-C2 |
| 45 | C2 | 36 | 709 | EP12050-45-C2 |
| 45 | C3 | 67 | 709 | EP12050-45-C3 |
| 50 | C3 | 49 | 788 | EP12050-50-C3 |
| 55 | C3 | 34 | 867 | EP12050-55-C3 |
| 60 | C3 | 22 | 946 | EP12050-60-C3 |

NOTICE: THIS SHEET AND ALL INFORMATION THEREON IS CONFIDENTIAL PROPERTY OF THURSDAY POLES LLC. THE RECIPIENT, BY ACCEPTING THIS DOCUMENT ASSUMES CUSTODY AND CONTROL AND AGREES THAT THIS DOCUMENT WILL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER OR TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED

DO NOT SCALE DRAWING

THURSDAY POLES PART NUMBER

TOLERANCES:
POLE LENGTH ±2 INCHES [50 MM]
WALL THICKNESS ±20%
STRAIGHTNESS 0.03 x LENGTH (FT)
HOLE DIAMETER ±1/32 INCH [0.8 MM]
PER ACMA AND ANSI D3917-23

MATERIAL

FINISH

| | | |
|---|---|---|
| DRAWN BY | AC | 07-31-26 |
| CHECKED BY | CC | 09-24-26 |
| ENGINEER | CC | 09-24-26 |
| PROJECT MANAGER | EV | 09-24-26 |
| APPROVED BY | EV | 09-24-26 |

REFERENCE DRAWING

THURSDAY POLES
840 Commerce Pkwy
Fortville, IN 46040
TEL (844) 800-POLE (7653)

EnduraPOLE™ Poles,
Undrilled Multiple Lengths

| SIZE | CAGE | DWG. NO. | REV |
|---|---|---|---|
| | | EP12050 | 0 |

SCALE NONE SHEET 1 OF 1