

EnduraPOLE™
FRP COMPOSITE UTILITY POLES

NOTES:
1. TOP CAP SHALL BE BLACK, 30% GLASS-FIBER REINFORCED HIGH-IMPACT POLYPROPYLENE
2. TOP CAP TO BE SECURED WITH FOUR (4) #10 x 1" SELF-DRILLNG 410 SS HEX HEAD SCREWS, SPACED 90° APART
3. REMOVE ALL FLASH, BURRS, AND SHARP EDGES

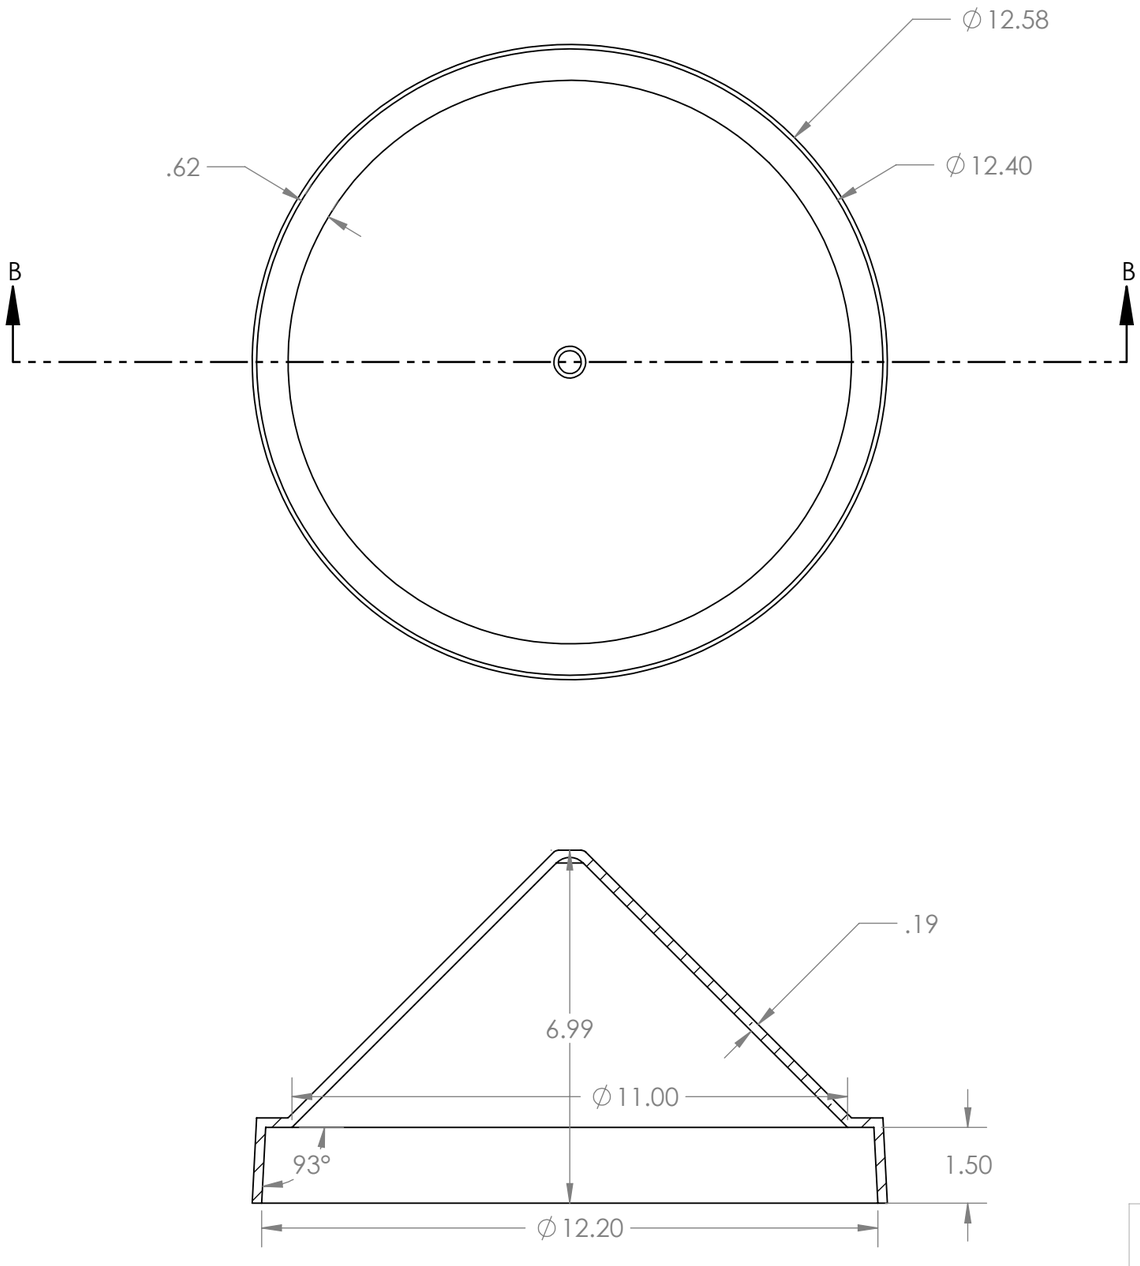

SECTION B-B
SCALE 1 : 3

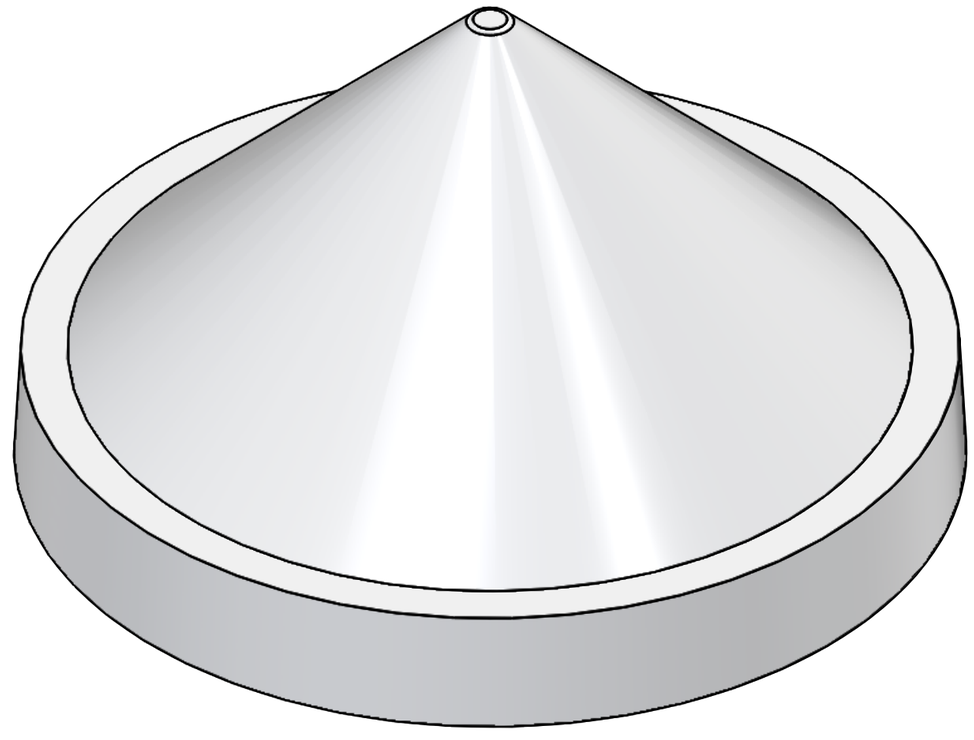

Isometric View
Scale 1 : 2

NOTICE: THIS SHEET AND ALL INFORMATION THEREON IS CONFIDENTIAL PROPERTY OF THURSDAY POLES LLC.
THE RECIPIENT, BY ACCEPTING THIS DOCUMENT ASSUMES CUSTODY AND CONTROL AND AGREES THAT THIS DOCUMENT WILL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER OR TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED

DO NOT SCALE DRAWING

TOLERANCES: ±1/16 INCH [1.5 MM]	DRAWN BY	AC	07-31-26
	CHECKED BY	CC	10-01-26
	ENGINEER	CC	10-01-26
	PROJECT MANAGER	EV	10-01-26
MATERIAL	APPROVED BY	EV	10-01-26
FINISH	REFERENCE DRAWING		
THURSDAY POLES PART NUMBER			

THURSDAY POLES
840 Commerce Pkwy
Fortville, IN 46040
TEL (844) 800-POLE (7653)

EnduraPOLE™ Top Cap

SIZE	CAGE	DWG. NO.	REV
		EP12050-TC	0

SCALE NONE | SHEET 1 OF 1